

ALWAYS  WIRELESS

WiFlyer™

Dialup Goes Wireless!

Instant, Portable WiFi for Dialup and Broadband



Dialup Wirelessly.

Attach to an ordinary phone line and enjoy wireless Internet access to your wirelessly enabled device.

Share a Line.

Simultaneously share a single Internet connection with multiple desktop and laptop PCs or Macs.

Wireless Broadband.



Connect to a DSL or cable modem and share both wired and wireless connections.



The WiFlyer™ base station is the world's first portable WiFi access point to provide wireless Internet access using either dialup or broadband connections.

By simply connecting the WiFlyer to the nearest phone line or Ethernet cable, you instantly create a WiFi hotspot with shareable Internet access at your home, hotel, or office - even internationally. Great for road warriors and homes and offices without DSL or cable. The pocket-sized WiFlyer is easily set up through an Internet browser, eliminating the hassles of software installation.

Compatible with AOL®, MSN®, EarthLink®, and most dialup ISPs and broadband connections, WiFlyer is great at providing wireless convenience anywhere you go.

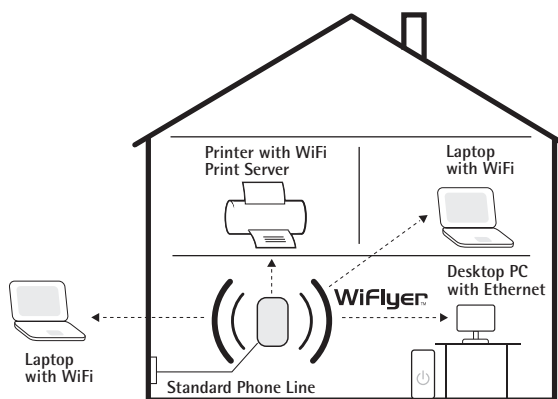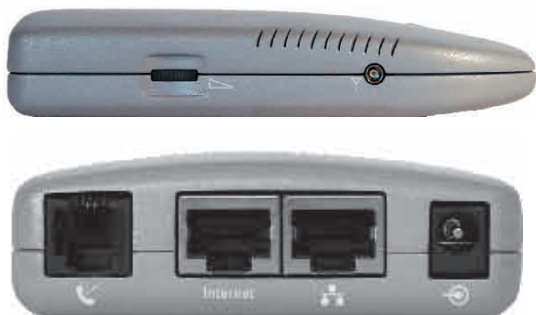

Technical Specifications

• System Requirements:

- > Analog phone line with RJ-11 connector and dialup Internet service¹, or
- > Broadband Ethernet line with RJ-45 connection and (cable/DSL) service
- > 2.4 GHz / 802.11b compatible wireless adaptor or
- > Ethernet LAN port
- > Windows® 95, 98, Me, NT, 2000, XP, Mac® OS, NetWare®, UNIX®, Linux®
- > Internet Explorer 5.0 or Netscape® 4.7 or higher

• Security:

- > Encryption: Hardware-based 40/64-bit & 128-bit WEP encryption
- > WiFi Protected Access (WPA) (Firmware Upgrade Available Q4-04)
- > MAC Address Authentication

• Routing Protocols:

- > Static & Dynamic Routing with TCP/IP, VPN pass-through (IPSec, PPTP, L2TP), NAT, PPPoE, DHCP (client & server)

• Interface Specifications:

- > Telephone: RJ-11 two-wire
- > Internet/WAN: 10 Mbps Ethernet, RJ-45
- > PC/LAN: 10 Mbps Ethernet, RJ-45
- > External antenna connector

• Dialup Modem:

- > V.92/V.90² with digital PBX protection

• Wireless:

- > IEEE 802.11b radio
- > Frequency Band: 2.4 GHz
- > Channels: 11
- > Transmit Power: +15 dBm
- > Antenna: Internal high gain diversity

• Standards:

- > V.92/V.90 modem
- > V.42/MNP2-4 error correction
- > V.42bis/MNP 5/V.44 compression
- > IEEE 802.3, 802.3u

• Application Compatibility:

- > Works with most Internet applications including:
Dialup Acceleration: SlipStream™ SP, AOL® 9.0 TopSpeed³, EarthLink® Accelerator, Propel™ Accelerator, Proxyconn®

IM: AOL® InstantMessenger™, Yahoo!® Messenger, Microsoft Messenger®

• Lighted Status Icons:

- > Power, Dialup Connect, Internet Ethernet Connect, PC Ethernet Connect, and Data

• Physical Specifications:

- > Manual modem volume control
- > Dimensions: 3.2" x 1.0" x 5.1" (80 x 25.4 x 129.5 mm)
- > Weight: 6.5 oz (0.184 kg) including power supply

• Power Adapter:

- > 100V-240V AC, 47-63Hz
- > Dimensions: 1.8" x 1.3" x 0.9" (46 x 34 x 24 mm)
- > Plug localized to country of sale including USA and Europe

• Power Requirements:

- > 5.5V – 16V DC at less than 3W

• Environmental Specifications:

- > Operating Temperature: 32 to 104° F (0 to 40°C)
- > Storage Temperature: -4 to 158° F (-20 to 70°C)
- > Acoustic noise: none

• Certifications:

- > FCC ITA / EIA 968
- > CE / R&TTE / TS 103 021 / CS-03
- > FCC Class B
- > EN55022 Class B, EN55024, EN50082-1, EN61000, IEC 60950

• Warranty:

- > 1-year limited warranty from date of purchase

• Package Contents:

- > WiFlyer base station
- > Phone cord (RJ-11)
- > Power adapter
- > Installation guide
- > Warranty/registration

¹ WiFlyer is compatible with most dialup ISPs including AOL®, MSN®, and EarthLink®. NetZero® and Juno® dialup access not currently supported.

² Capable of receiving at up to 56K and sending at up to 53 Kbps. Actual speeds may vary. Requires compatible analog phone line.

³ AOL for Broadband service is required.